



# Spoilt for choice...










Terms and conditions apply to the warranty on DuraPass doors, please ask for full details.





Insulated Door Panel

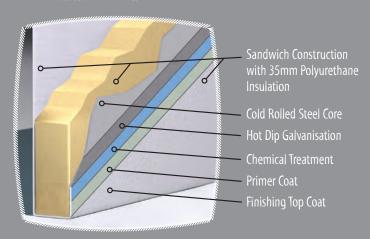

### Brilliant!

The DuraPass door a brilliant solution for access to your garage, outhouse or anywhere that needs a good looking, high performance entry door.

Clever design keeps the face of DuraPass doors free from rivets and welds, eliminating corrosion stain from fixings. Just one of the features that makes DuraPass a true innovation! See pages 6 and 7 for more features.



#### The Door Panel

Doors are available in single skin steel or insulated versions. The insulated door (picture above left) has a sandwich construction of twin corrosion protected steel skins filled with an insulating core. The rear of the door panel is finished in an off-white light reflecting finish. On insulated Golden Oak and Rosewood doors the inside foil finish will match the exterior.

The single skin door (pictured above right) is constructed from corrosion protected steel. The frame and door stiffening sections match the front face of the door, whilst the rear of the door panel is finished in an off-white light reflecting finish.



## Great to come home







#### Door Handles



#### Optional Handles:

Add rich style to your door with a choice of three handle upgrades. Your hinges will also be upgraded in a complementary finish.



## 







Terms and conditions apply to the warranty on DuraPass doors, please ask for full details

# DuraPass ertical Tongue & Groove in White



## Good looking

Each door looks great on its own but is also designed to complement with many popular garage door designs. Creating matching styling for your home has never been easier!

#### Let the light in!

Add a add a touch of individua style & elegance with our glazing options. Assembled with Toughened Safety Glass (Glass ABS 6206: 1981), our opaque windows allow light to enter your garage without compromising security. Clear versions are also available.

Windows are positioned centrally in the upper third of the door panel. Windows are only available for DuraPass Insulated doors.



#### : Stainless Steel:





Round

Square

Clear or opaque options



Clever design - no rivets or welds to the front face of the door.

#### Matching design

- Door and frame match perfectly, nice handle too!







Factory finished solid colours and wood effect finishes create a classic design statement on any home. See previous pages for the full range.



## Award winning innovation


DuraPass has an award for innovation and it's easy to see why! Clever design and smart features bring great benefits to every-day use and offer excellent durability and life-span. DuraPass is available in inward or outward opening versions.






CE marked for safety and tested to the latest European safety legislation.










Low-profile threshold makes it easy to move any wheeled item in or out.

# Quality in every detail.

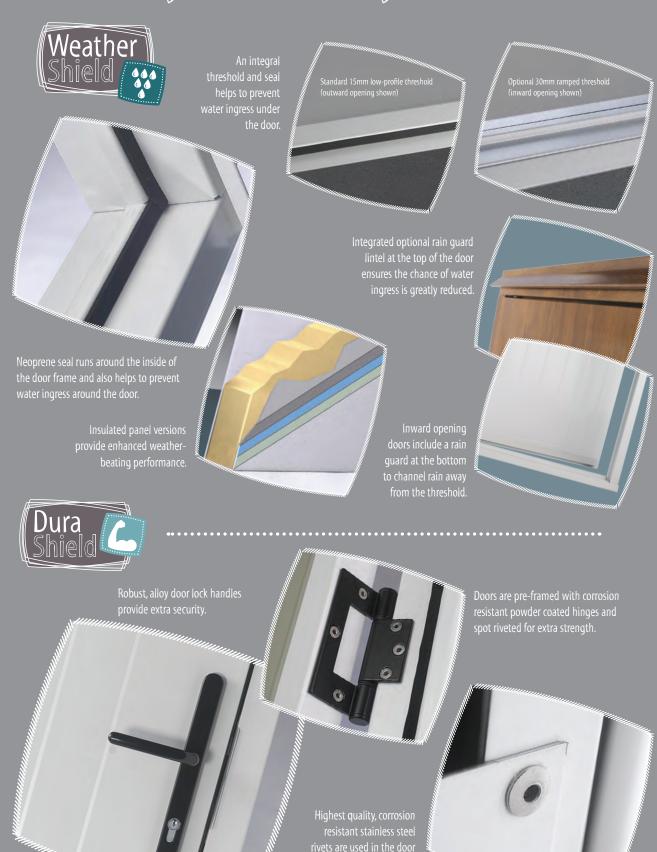



## Sizes & Technical Specifications







erms and conditions apply to the warranty on DuraPass doors, please ask for full detail





Doors are available in standard and custom sizes


Standard Overall Frame Widths Standard Overall Frame Heights

890mm 1865mm 990mm 2090mm 1140mm 2190mm 2390mm

Any custom width from Any custom height from 790mm - 1140mm 1850mm - 2390mm

Standard Colours: White, Golden Oak\*, Rosewood \*Not available on Georgian style Custom Colours: Select range, Heritage range, Any RAL or BS Colour

#### **Overall Frame Dimensions**



FW Frame width

CW Clear passage width = FW - 127mm

FH Frame height

CH Clear passage height = FH - 80mm For standard 15mm low profile threshold

CH Clear passage height = FH - 90mm For optional 30mm ramped threshold

#### To order specify:

<u>Ordering size:</u> No fitting clearance allowed. Garage Door Systems recommends allowing 10mm in

width and height when fitting between brickwork.

<u>Handing:</u> Hinged on the left or right as viewed from the outside.

<u>Opening:</u> Outward or inward as viewed from the outside.

<u>Threshold:</u> Standard 15mm low-profile threshold or optional 30mm ramped threshold.

Standard white and foil doors are supplied with a protective film that must be removed within thirty days.

#### Example:


For a 1000mm x 2100mm structural opening, order your door as 990mm x 2090mm. Please see Garage Door Systems Survey/Order form for full details,

diagrams and additional fitting options.

#### Thresholds



Standard 15mm low profile threshold



Optional 30mm threshold with ramped adjustable baseplate

Fitting note: To minimise the ingress of rain run-off between the foot of the door leaf and the door threshold, consideration must be given the floor surface to which the door is fitted, ensuring that water is able to drain freely away. This particularly important on inward opening doors.



Tel: 028 2565 5555

Tel: 0870 242 3 242

Tel: 1850 510 510

Email: info@gdsdoors.eu

NI:

UK

Rol



Fax: 028 2564 4030 Fax: 0800 085 2741 Fax: 028 2564 4030 Web: www.gdsdoors.eu Authorised Specialist