

Pass


DOOR SYSTEMS

.COM

GarageTM

DOOR SYSTEMS

Steel Door Solutions



DuraPass
Side hinged Personnel Door

Made to
measure



CE
EN 14351-1



ERA[®]

Steel Doors designed & built to the ideal requirements of your home

The DuraPass door is a brilliant solution for access to your building - a good looking, high performance entry door.

Inspiring confidence & trust


- Manufactured in the UK.
- Fast turnaround and delivered throughout the UK & Ireland.
- CE marked, certified product.
- Innovation award winner with Patented design.
- **ERA** Multi-point locking.



Garages



Steel Buildings



Modular Buildings



Flush in Goosewing Grey



Linear Medium in Anthracite

U-Value 1.9 W/m²K

Fully finished colours

Colour

Choose a finish from our standard or wood effect colour palettes:

Standard Colours

WHITE RAL 9016	BLACK RAL 9005	ANTHRACITE RAL 7016	VANDYKE BROWN BS 08 B 29	GOOSEWING GREY RAL 080 70 05	GOLDEN OAK*
-------------------	-------------------	------------------------	-----------------------------	------------------------------------	-------------

Wood Effect

*Golden Oak is recommended for Flush door designs only
Colours shown are for guide purposes only and are limited by the printing process. Always request to see a finish sample for confirmation of colour.
RAL numbers are provided as the nearest approximation to the colour and will not match precisely.



Stainless steel is also available for aesthetics or clean environment applications - talk to us about your requirements.



Linear Large in White




Vertical Board in Black

Feature file - Award winning innovation

Dependable security

The dead bolt locking with twin hook latches and four security-pinned stainless-steel hinges per leaf provide robust, dependable security. 8 point locking is the result – 4 security pinned hinges plus the ERA lock's twin hook latches, latch and mortice.



Durable, stylish security

The corrosion resistant stainless steel handle, lock, strike plate and hinges provide attractive and durably finished secure access.


3 keys as standard

Supplied with 3 keys and a Euro-profile cylinder as standard. Replacement keys can be duplicated from a standard blank at any locksmith.



Clever design

No rivets or welds to the front face of the door and colour matched frame as standard.




Lightweight construction

The door is inherently strong and rigid, yet lightweight. 45kg for a single leaf door and frame is typical, making handling easier and safer.

Low profile

Standard low-profile threshold with weatherseal makes it easy to move any wheeled item in or out. Open-in or open-out options. Thresholds available to meet the requirements of The Equality Act, Building regulations Part M and BS 3800.



8
LOCKING
POINTS



Pass door -
inside view

The rear face of the door panel on all standard colour and wood effect doors is finished in a soft-white light reflecting finish. The frame will match the finish of the front face. The contrast between door leaf and frame assists with EA compliance for Visual Contrasts and Light Reflective Values (LRV).

Shown above is a Goosewing Grey door from the inside - White inner face, Goosewing Grey Frame.

U-Value 1.9 W/m²K
Pre-framed doorsets

Designer
Style



Let the light in

Vision Panels window options can be configured in a variety of ways to suit your needs. See page 7 for design options.


Weather
Shield



All round weather seals

Q-Lon seals run around the inside of the door frame to help prevent water ingress around the door.

Weather
Shield




44mm Insulated door

44mm Insulated panel in exterior grade steel is factory coated and provides enhanced weather-beating performance - U-Value 1.9 W/m²K.

Extra strength

Doors are pre-framed with four stainless steel hinges, two of which are security-pinned.

Built to
Last



Weather
Shield





Seal strip

Inward opening doors include a threshold and seal strip onto which the door leaf closes. This helps to reduce water ingress under the door leaf.



Frames

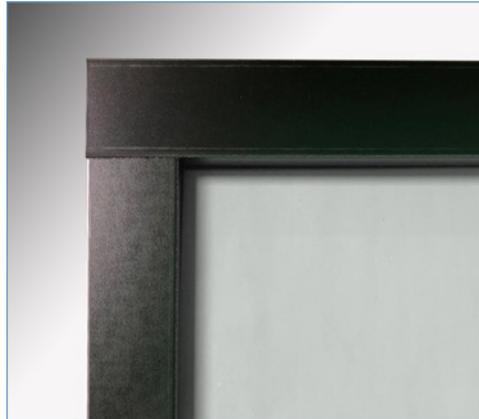

Garages

70mm Standard Frame

The standard frame is versatile and quick to install. Available in both open out or open in variants.

Optional Extras



Carlisle Brass CDG003 Medium Duty Closer

Fixed Power Compact Overhead Closer

- CE Marked to EN 1154
- EN Power 3
- Adjustable closing speed and latch action

Internal Thumb Turn



Door are available with a thumb turn as an option.




Reinforcing Plates for Closers

Doors, when ordered with a closer, are prepared with reinforcing plates and nutserts for ease of installation.

The best performance for your door

The area within the arc of the door's swing must be level or falling away to ensure the door can open unhindered.

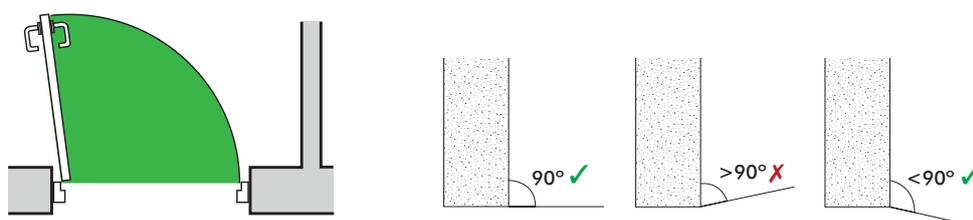

Optional Vision panels





Clear Glass or Georgian Wired (GWPP) in toughened safety glass (Glass ABS 6206: 1981)

People should be able to view others approaching or standing either side of a door to avoid the risk of collision. (There may be circumstances where for reasons of privacy or security this may not be appropriate or possible).


The diagram below shows the minimum requirements to satisfy Part M.


(Please note that this diagram is now shown in Part K of the Building Regulations, not Part M. It is referenced in Part M).

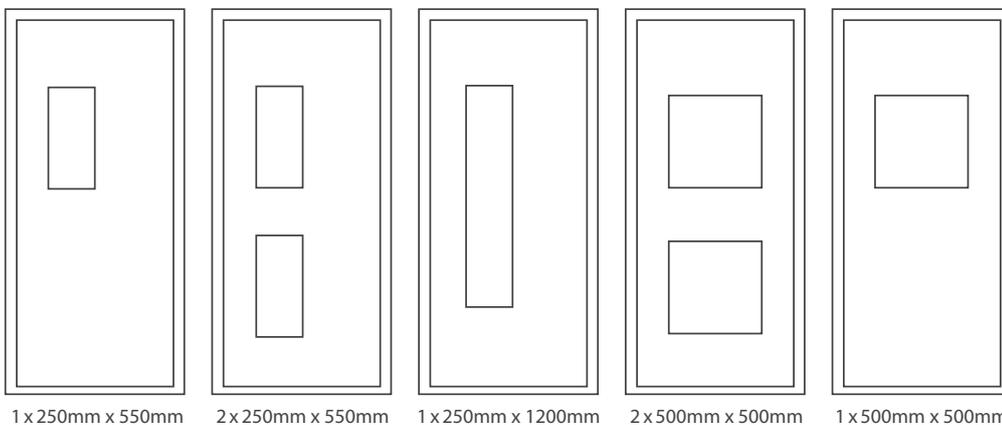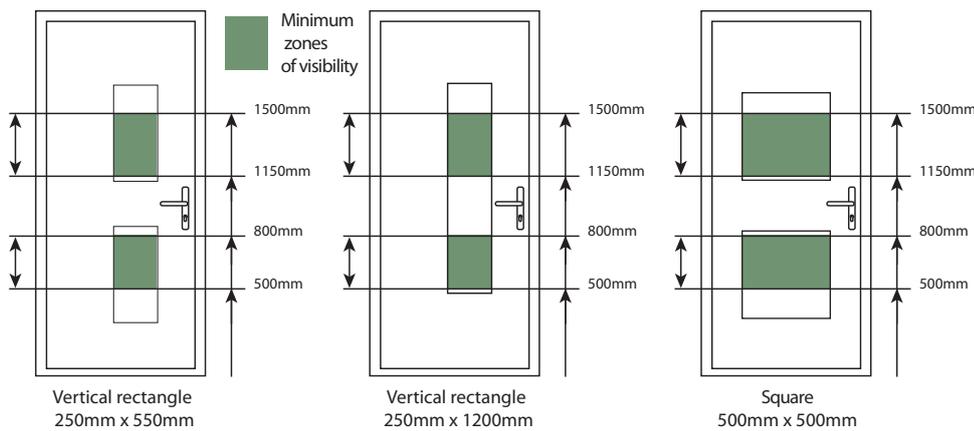

Floor rebate

To help assist water draining away effectively from the face of your door and prevent water ingress you must have a rebate (minimum 10mm) high behind the door threshold or where your door seal meets a level floor. If your floor is not rebated and not sloping away from the face of your door you will be susceptible to water ingress as water will not be able to drain away effectively.

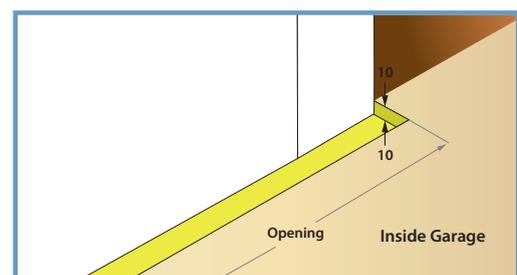

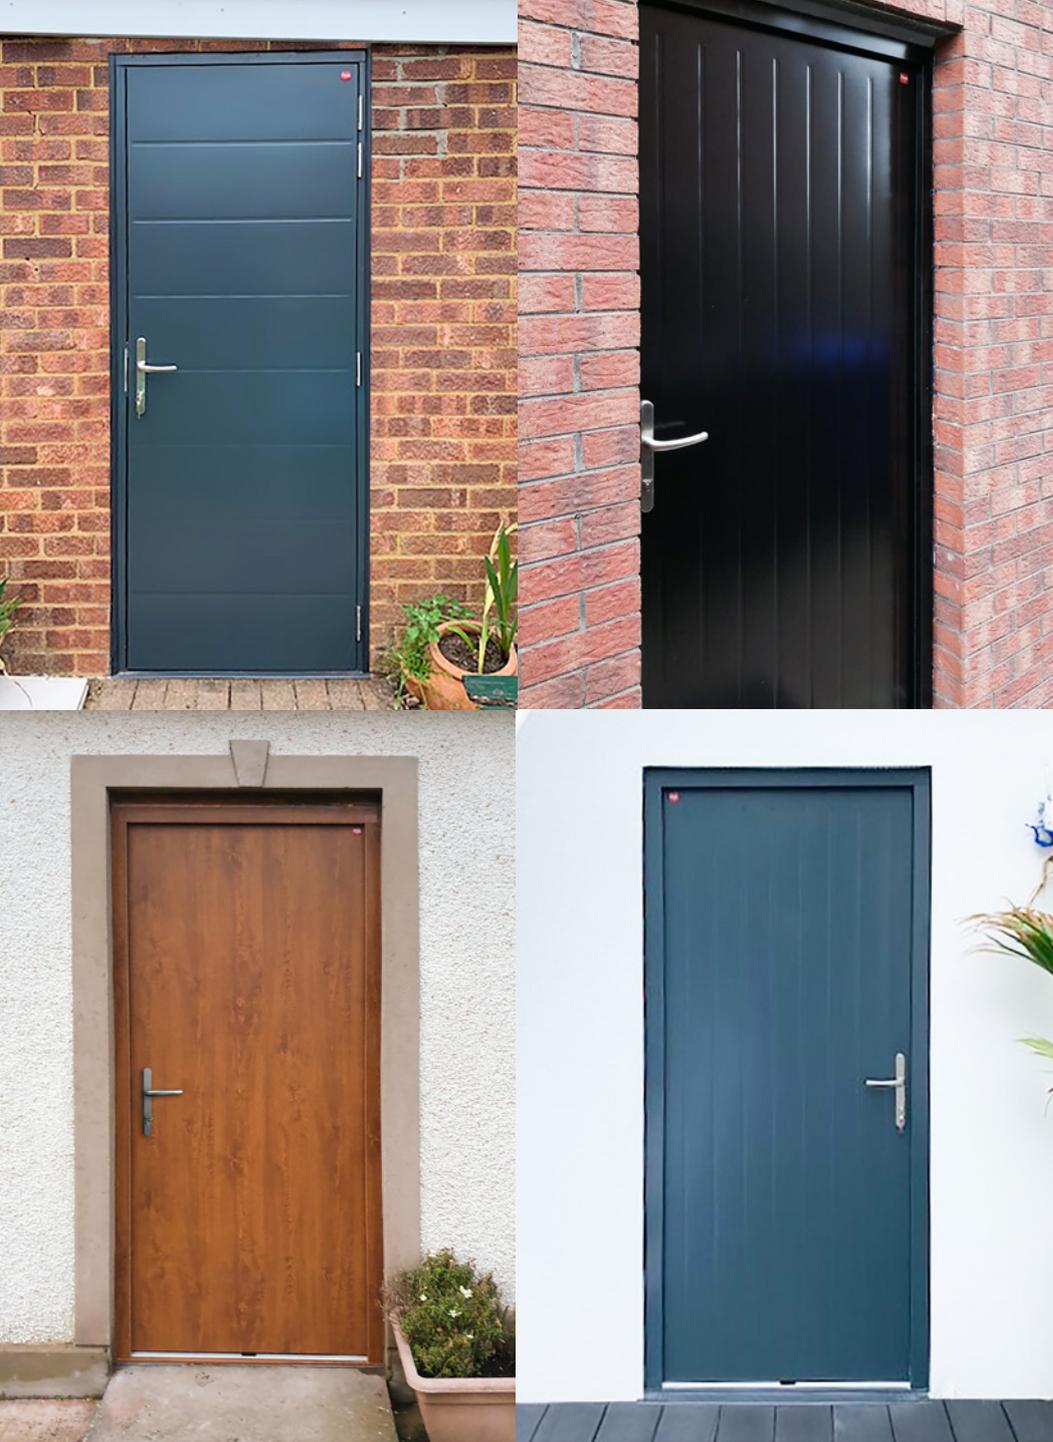

Pass Door Systems
 Unit 5 & 6, Woodside Road Industrial Estate,
 Broughshane BT42 4QJ

E: info@passdoorsystems.com
 Web: www.passdoorsystems.com

Pass Door Systems is a trading name of Garage Door Systems Limited

Garage Door Systems Limited,
 Wakehurst Ind. Est., Ballymena BT42 3AZ

NI: Tel: 028 2565 5555 Fax: 028 2564 4030
 Rol Tel: 1850 510 510 Fax: 028 2564 4030
 UK Tel: 0870 242 3 242 Fax: 0800 085 2741

Email: info@garagedoorsystems.co.uk
 Web: www.garagedoorsystems.co.uk

Pass Door Systems reserves the right to alter specifications to design and manufacture without notification. All specifications are correct at time of publication, errors and omissions excepted. April 2021 Issue 1
 Colours shown are for guide purposes only and are limited by the printing process.